

Generated:

11-November-2019

Content last updated:

12-April-2019

See Change Log for summary of changes.



CIC Migration

Checklists

Abstract

Follow these checklists to complete a CIC 2.4/3.0 to 2015 R1 or later migration, and if applicable, an Interaction Dialer 2.4/3.0 to 2015 R1 or later migration. Each summary step contains a reference to the CIC Migration Guide.

For the latest version of this document, see the PureConnect Documentation Library at: http://help.genesys.com/cic.

For copyright and trademark information, see https://help.genesys.com/cic/desktop/copyright_and_trademark_information.htm.

Table of Contents

Table of Contents	2
Checklist: Complete Migration Planning Procedures	4
Notify PureConnect Customer Care about the migration	4
Upgrade your CIC, Interaction Media Server, (and Interaction Dialer) product licenses	4
Review migration planning considerations	4
Review guidelines for creating your migration environment	5
Export 2.4 or 3.0 Configuration Data	6
Checklist: Install Interaction Migrator	6
About Interaction Migrator	6
Review Interaction Migrator version information	6
Fulfill requirements for installing Interaction Migrator	6
Install Interaction Migrator on the CIC 2.4/3.0 server	6
Checklist: Export CIC 2.4/3.0 (and Dialer 2.4/3.0) Configuration Data	6
Review CIC configuration data migration information	7
If applicable, run the Interaction Recorder Migration Prep Utility (and ESs)	7
Complete handler pre-migration procedures	7
If applicable, complete Dialer pre-migration procedures	7
Export CIC 2.4/3.0 and (Dialer 2.4/3.0) configuration data using Interaction Migrator	7
Prepare the 2015 R1 or Later Server Environment	8
Checklist: Prepare the CIC 2015 R1 or Later Server Environment	8
Fulfill PureConnect 2018 R4 or later server requirements	8
Fulfill CIC 2015 R1 through 2018 R3 server requirements	8
Fulfill CIC 2015 R1 or later database server requirements	8
Install the CIC 2015 R1 or later server and create the CIC 2015 R1 or later database, making choices applicable to migrations	8
If applicable, change the site ID on the CIC 2.4/3.0 server	9
Change the site ID on the CIC 2015 R1 or later server	9
Install Interaction Migrator on the CIC 2015 R1 or later server	9
Checklist: Prepare the Interaction Dialer 2015 R1 or Later Server Environment	9
Fulfill PureConnect 2018 R4 or later server requirements	9
Fulfill CIC 2015 R1 through 2018 R3 server requirements	9
Fulfill Dialer 2015 R1 or later database server requirements	9
Install the CIC 2015 R1 or later server	10
Create a UDL file for the 2015 R1 or later database (CIC server)	10
Fulfill ODS 2015 R1 or later server requirements	10
Install the ODS 2015 R1 or later server(s)	10
Migrate the Database	11
Checklist: Install CIC Database Migration Assistant	11
Review contents of CIC Database Migration Assistant package	11
Review CIC Database Migration Assistant version information	11
Fulfill CIC Database Migration Assistant client computer requirements	11
Install CIC Database Migration Assistant package on CIC Database Migration Assistant client computer	11
Checklist: Prepare for CIC Database Migration Prepare the CIC Database Migration Assistant client computer	11
Upgrade the CIC 2.4/3.0 and CIC 2015 R1 or later database schema	12 12
Prepare the CIC 3.0 and CIC 2015 R1 or later databases	12
Prepare the CIC 3.0 and CIC 2015 R1 or later databases	13
If applicable, rescue orphaned recordings in Interaction Recorder	13
Checklist: Migrate the CIC 3.0 Database	13
About CIC Database Migration Assistant	14
Review database migration considerations	14
Migrate the CIC 3.0 database using CIC Database Migration Assistant	14
Review CIC Database Migration Assistant troubleshooting information	14
Complete CIC 2015 R1 or later database post-migration procedures	14
Checklist: Prepare for Interaction Dialer Database Migration	15
Prepare the CIC Database Migration Assistant client computer	15
Upgrade the Interaction Dialer 2015 R1 or later database schema	15
Prepare the Interaction Dialer 3.0 and Interaction Dialer 2015 R1 or later databases	15
Apply Dialer ESs to CIC 2015 R1 or later and CIC/ODS 2015 R1 or later servers	15
Checklist: Migrate the Interaction Dialer 2.4/3.0 Database	16
Review Dialer database migration considerations	16
Migrate the Dialer 2.4/3.0 database using CIC Database Migration Assistant for Dialer	16
If needed, review CIC Database Migration Assistant for Dialer troubleshooting information	16

Complete Dialer 2015 R1 or later database post-migration procedures	16
Migrate the Configuration	17
Checklist: Import CIC 2.4/3.0 (and Dialer 2.4/3.0) Configuration Data	17
Before importing configuration data	17
Import CIC 2.4/3.0 (and Dialer 2.4/3.0) configuration data to CIC 2015 R1 or later server using Interaction Migrator	17
Re-activate ACD email routing	17
Review migrated server parameters using the Server Parameter Query	17
Complete handler post-migration procedures	17
Note change in default SIP transport protocol	17
Complete Interaction Dialer post-migration procedures	18
Checklist: Migrate CIC 3.0 Managed IP Phones	19
Review Polycom firmware requirements	19
Review the options for pointing the phones to the CIC 2015 R1 or later server	19
Point the phones to the CIC 2015 R1 or later server using DHCP custom option or other available options	19
Checklist: Migrate Interaction Media Server 3.0	19
Review Interaction Media Server 3.0 to 2015 R1 or later migration options	19
Fulfill Interaction Media Server migration requirements	19
Install Interaction Migrator on Interaction Media Server 3.0	20
Export Interaction Media Server 3.0 configuration data	20
Complete Interaction Media Server pre-migration procedures	20
Install a new Interaction Media Server 4.0 or upgrade existing Interaction Media Server 3.0 appliance to 2015 R1 or later	20
Install Interaction Migrator on Interaction Media Server 4.0	20
Import Interaction Media Server 3.0 configuration data	20
Complete Interaction Media Server post-migration procedures	21
Migrate Client Workstations	22
Checklist: Complete Workstation Migration Planning Procedures	22
Review options for upgrading CIC 3.0 client workstation applications to CIC 2015 R1 or later	22
Review CIC 3.0 to CIC 2015 R1 or later client workstation upgrade installation information	22
Fulfill CIC 2015 R1 or later client workstation hardware requirements	22
Fulfill CIC 4.0 client workstation software requirements	22
Review changes to IC User Applications in CIC 2015 R1 or later	22
Review how custom client settings are handled during the migration	22
Review how localized client workstation applications are handled during the migration	22
Review how Interaction Dialer client workstation application upgrades are handled during the migration	23
Checklist: Migrate CIC 3.0 Workstations Using Interactive Update	23
Fulfill required CIC and Interactive Update versions	23
Review Interactive Update Provider 1.0 and 2015 R1 or later settings	23
Review CIC 3.0 to CIC 2015 R1 or later migration client workstation migration summary	23
Complete Part 1: Client workstation upgrade tasks on Interactive Update Provider 1.0	23
Complete Part 2: Client workstation upgrade tasks on Interactive Update Provider 2015 R1 or later	23
Checklist: Migrate CIC 3.0 Workstations Using Setup.exe	24
Review Setup.exe functionality	24
Upgrade IC User Applications using Setup.exe	24
Upgrade CIC Business Manager Applications using Setup.exe	24
Upgrade CIC Server Manager Applications using Setup.exe	24
Migrate Other Products	25
Checklist: Migrate Interaction Conference	25
Review Interaction Conference components to migrate	25
Fulfill Interaction Conference migration requirements	25
Migrate Interaction Conference	25
Checklist: Migrate Interaction Director	25
Review Interaction Director components to migrate	26
Fulfill Interaction Director migration requirements	26
Migrate Interaction Director monitored servers	26
Migrate the Director server	26
Change Log	27

Checklist:	Complete	Migration	Planning	Procedui	es

Notify PureConnect Customer Care about the migration
Upgrade your CIC, Interaction Media Server, (and Interaction Dialer) product licenses
Before you migrate, convert your existing license to a 4.0 license. For more information about licensing changes and requirements, see <i>CIC 4.0 License Upgrade Guide</i> on the Product Information site at https://my.inin.com/products/cic/Pages/Marketing-Collateral.aspx .
Request a CIC product (and Interaction Dialer) upgrade, and order and generate the CIC (and Interaction Dialer) 4.0 license. Request an Interaction Media Server upgrade. See:
 ""Upgrade Your CIC and Interaction Media Server Product Licenses" and ""Interaction Dialer License Upgrades" in the CIC Migration Guide. CIC 4.0 License Upgrade Guide
Review migration planning considerations
Review the CIC components that the current migration package release supports and how it can impact your migration. CIC configuration data migration CIC database migration Telephony Switchover Handlers Managed IP phones Interaction Media Server Workstations Language Packs Custom applications Custom reports Interaction Dialer Interaction Conference Interaction Director See ""Migration Planning"" in the CIC Migration Guide.
Review guidelines for creating your migration environment We recommend that your CIC 2.4/3.0 to CIC 2015 R1 or later migration environment include a development environment for testing system functionality as you complete the migration tasks. Review and consider the guidelines presented in Appendix A, which provide reasonable fall back strategies for various stages of the migration process: The development environment Virtualized development environment recommended The development database The development CIC server Other servers in the development environment Migrating to the product environment See ""Appendix A: Guidelines for Creating Your Migration Environments"" in the CIC Migration Guide.

Export 2.4 or 3.0 Configuration Data

Checklist: Install Interaction Migrator

	About Interaction Migrator
	Interaction Migrator exports and imports configuration data related to the CIC server, Interaction Dialer, Interaction Media Server, and other CIC components.
	See: • "About Interaction Migrator" in the <u>CIC Migration Guide</u> . • <u>Interaction Migrator Technical Reference</u> .
_	Review Interaction Migrator version information
	The tools in the latest supported migration package support the latest CIC release and patch. The Interaction Migrator install indicates the CIC release version, for example, <code>Migrator_2015_R2.msi</code> . The Interaction Migrator install no longer contains the build version number in the install file name. However, once installed, the build version number is still available on the <code>Welcome</code> page in the lower right corner.
	See "Interaction Migrator Version Information" in the <u>CIC Migration Guide</u> .
П	
_	Fulfill requirements for installing Interaction Migrator
	For each CIC server and Interaction Media Server that you intend to export or import data as part of the migration, ensure that you have the Microsoft .NET Framework version the CIC version supports installed.
	 .NET Framework 4.5.2 or later and 3.5.1 for CIC 4.0 and Interaction Media Server 4.0. .NET Framework 3.0 for CIC 3.0 and Interaction Media Server 3.0
	See "Fulfill Microsoft .NET Framework Requirements" in the <u>CIC Migration Guide</u> .
П	
_	Install Interaction Migrator on the CIC 2.4/3.0 server
	For instructions on downloading and copying the Migration .iso, see the CIC 2.4/3.0 to CIC 2015 R1 or Later Migrations page at https://my.inin.com/products/cic/Pages/Migrations.aspx .
	See "Install Interaction Migrator" in the <u>CIC Migration Guide</u> .

Checklist: Export CIC 2.4/3.0 (and Dialer 2.4/3.0) Configuration Data

Review CIC configuration data migration information The current release of the CIC 2.4/3.0 to CIC 4.0 migration package supports migrating all users, phones, and fur one CIC 2.4/3.0 server (pair) to a new CIC 2015 R1 or later server (pair) in one phase using Interaction Migrator. Interaction Migrator exports and imports Interaction Dialer 2.4/3.0 configuration data along with the CIC 2.4/3.0 configuration data.	nctions from
one CIC 2.4/3.0 server (pair) to a new CIC 2015 R1 or later server (pair) in one phase using Interaction Migrator. Interaction Migrator exports and imports Interaction Dialer 2.4/3.0 configuration data along with the CIC 2.4/3.0	nctions from
See "Export CIC 2.4/3.0 Configuration Data" in the CIC Migration Guide.	
If applicable, run the Interaction Recorder Migration Prep Utility (and ESs)	
If you use Interaction Recorder, you may need to run the Interaction Recorder Migration Prep Utility before export data.	ing CIC
Locate the Interaction Recorder Migration Prep Utility .zip file, for example, IRMigrationPrep_30.zip, on the .iso.	ne Migration
See "Who Should Run the Interaction Recorder Migration Prep Utility?" and "Run the Interaction Record Migration in the CIC Migration Guide.	Prep Utility"
Complete handler pre-migration procedures	
Interaction Migrator does not publish or manage custom handlers.	
If you use custom handlers, follow the step by step handler pre-migration procedures.	
 Plan for base handler modifications Plan for backup handler customizations 	
Determine which handlers have changed	
Back up most recently published handlers	
See "Complete Handler Pre-migration Procedures" in the <u>CIC Migration Guide</u> .	
If applicable, complete Dialer pre-migration procedures	
If you use Interaction Dialer, follow the Interaction Dialer pre-migration procedures:	
Copy the UDL folder from the CIC server to the CIC/ODS server Operation Distance of invention file from the CIC server to the CIC/ODS 8.4/9.9 common to the CIC/ODS 8.4/9 common to th	
 Copy the Dialer configuration file from the CIC server to the CIC/ODS 2.4/3.0 server See "Complete Interaction Dialer Pre-migration Procedures" in the <u>CIC Migration Guide</u>. 	
See Complete interaction Dialer Fre-Hilgration Frocedures in the Cite Wilgration Guide.	
Function of Close 4/2 0 and (Biolog 2.4/2.0) configuration data using lutage ation Missester	
Export CIC 2.4/3.0 and (Dialer 2.4/3.0) configuration data using Interaction Migrator	
Follow the step by step instructions to run Interaction Migrator on the CIC 2.4/3.0 server to export the CIC (and E 2.4/3.0 configuration data.	ialer)
If this server is a CIC/ODS server, Interaction Migrator prompts for the location of the Dialer configuration file, so can specify the Dialer configuration data to export.	that you
See "Export CIC 2.4/3.0 and (Dialer 2.4/3.0) Configuration Data Using Interaction Migrator" in the CIC Migration G	<u>uide</u> .

Prepare the 2015 R1 or Later Server Environment

Checklist: Prepare the CIC 2015 R1 or Later Server Environment

Fulfill PureConnect 2018 R4 or later server requirements For PureConnect 2018 R4 or later only, install a Windows 2016 or Windows 2012 R2 server with Microsoft .NET Framework 4.7 or later and Microsoft .NET Framework 3.5.1. "CIC Server Hardware Requirements" and "CIC Server Software Requirements" in the CIC Migration Guide. PureConnect Installation and Configuration Guide. • CIC Virtualization Technical Reference. Fulfill CIC 2015 R1 through 2018 R3 server requirements For CIC 2015 R1 through 2018 R3 only, install a Windows 2012 R2 or Windows 2008 R2 SP1 server with Microsoft .NET Framework 4.5.2 or later and Microsoft .NET Framework 3.5.1. "CIC Server Hardware Requirements" and "CIC Server Software Requirements" in the CIC Migration Guide. PureConnect Installation and Configuration Guide. • CIC Virtualization Technical Reference. Fulfill CIC 2015 R1 or later database server requirements Before installing the CIC 2015 R1 or later server, ensure that you have fulfilled the requirements for the 2015 R1 or later database server. See: "Database Server Requirements CIC 2015 R1 or Later" in the <u>CIC Migration Guide</u>. PureConnect Installation and Configuration Guide. Install the CIC 2015 R1 or later server and create the CIC 2015 R1 or later database, making choices applicable to migrations Complete the following procedures: • Run the CIC 2015 R1 or later server install • Run IC Setup Assistant Make recommended selections for migrations Run the CIC 2015 R1 or later Firmware install Run the CIC 2015 R1 or later Documentation Library install • (If applicable) Run one or more CIC 2015 R1 or later Language Pack installs • Run the Interactive Update Provider and Interactive Update Client 2015 R1 or later installs See: • "CIC 2015 R1 or Later Server Installation" in the CIC Migration Guide.

• PureConnect Installation and Configuration Guide.

_	If applicable, change the site ID on the CIC 2.4/3.0 server
	If you are consolidating multiple CIC 2.4/3.0 servers that have identical site IDs, change the site ID for each of those servers to make them unique, before importing the CIC 2.4/3.0 configuration data.
	See "If Applicable, Change Site ID on 2.4/3.0 Servers" in the <u>CIC Migration Guide</u> .
7	Change the site ID on the CIC 2015 R1 or later server
	Set the site ID of the new CIC 2015 R1 or later server so that it is different from the site ID of the CIC 2.4/3.0 server, before importing the CIC 2.4/3.0 configuration data.
	See: "Change Site ID on the CIC 4.0 Server" in the <u>CIC Migration Guide</u> .
J	Install Interaction Migrator on the CIC 2015 R1 or later server
	Follow the step by step instructions to install Interaction Migrator on the CIC 2015 R1 or later server.
	See "Install Interaction Migrator" in the <u>CIC Migration Guide</u> .

Checklist: Prepare the Interaction Dialer 2015 R1 or Later Server Environment

For Interaction Dialer sites only. Fulfill PureConnect 2018 R4 or later server requirements For PureConnect 2018 R4 or later only, install a Windows 2016 or Windows 2012 R2 server with Microsoft .NET Framework 4.7 or later and Microsoft .NET Framework 3.5.1. Migrations require Interaction Dialer 4.0 SU 1 or later. See: "CIC Server Hardware Requirements" and "CIC Server Software Requirements" in the <u>CIC Migration Guide</u>. Interaction Dialer Installation and Configuration Guide. Fulfill CIC 2015 R1 through 2018 R3 server requirements For CIC 2015 R1 through 2018 R3 only, install a Windows 2012 R1 or Windows 2008 R2 SP1 server with Microsoft .NET Framework 4.5.2 or later and Microsoft .NET Framework 3.5.1. Interaction Dialer 4.0 SU 1 or later is required for migrations. • "CIC 2015 R1 or Later Server Hardware Requirements for Dialer" and "CIC 2015 R1 or Later Server Software Requirements for Dialer" in the CIC Migration Guide. • Interaction Dialer Installation and Configuration Guide. Fulfill Dialer 2015 R1 or later database server requirements Before installing the CIC 2015 R1 or later server, ensure that you have fulfilled the requirements for the 2015 R1 or later Dialer database server. • "Database Server Requirements" in the <u>CIC Migration Guide</u>.

• Interaction Dialer Installation and Configuration Guide.

Install the CIC 2015 R1 or later server See:
 "Install the CIC 2015 R1 or Later Server" in the <u>CIC Migration Guide</u>. <u>Interaction Dialer Installation and Configuration Guide</u>.
Create a UDL file for the 2015 R1 or later database (CIC server)
A database connection file (.UDL) is required to ensure that Interaction Dialer works cooperatively with your company's database system if the CIC database contains a contact list. The UDL file resides on the CIC server. See:
 "Create a UDL File for the New 2015 R1 or Later Database" in the <u>CIC Migration Guide</u>. <u>Interaction Dialer Installation and Configuration Guide</u>.
Fulfill ODS 2015 R1 or later server requirements
The Outbound Dialer Server (ODS) 2015 R1 or later server requires: • CIC 2015 R1 or later • Interaction Dialer 2015 R1 or later
See: • "ODS 2015 R1 or Later Server Software Requirements" in the <u>CIC Migration Guide</u> . • <u>Interaction Dialer Installation and Configuration Guide</u> .
Install the ODS 2015 R1 or later server(s)
See: • "Install the ODS 2015 R1 or Later Server" in the <u>CIC Migration Guide</u> . • <u>Interaction Dialer Installation and Configuration Guide</u> .


Migrate the Database

Checklist: Install CIC Database Migration Assistant

_	Review contents of CIC Database Migration Assistant package
	The CIC Database Migration package consists of several CIC and Interaction Dialer utilities, tools, and scripts.
	See "About the CIC Database Migration Assistant Package" in the CIC Migration Guide.
_	Review CIC Database Migration Assistant version information
	The tools in the latest supported migration package support the latest CIC release and patch. The CIC Database Migration Assistant install indicates the CIC release version, for example, DBMigrationAssistant_2015_R2.msi. The CIC Database Migration Assistant install no longer contains the build version number in the install file name. However, once installed, the build version number is still available in the Welcome dialog box in the lower right corner.
	There may be instances when Genesys updates CIC Database Migration Assistant between CIC releases to support database schema changes in the latest patch. If so, Genesys posts a new migration package on the Downloads page at https://my.inin.com/products/Pages/Downloads.aspx and updates the Release Posted on date.
	See "CIC Database Migration Assistant Version Information" in the <u>CIC Migration Guide</u> .
_	Fulfill CIC Database Migration Assistant client computer requirements
	You can install CIC Database Migration Assistant on most any computer; however, do not install CIC Database Assistant on the CIC server.
	For PureConnect 2018 R4 or later only, ensure that you have Microsoft .NET Framework 4.7 or later and 3.51 installed on the CIC Database Migration Assistant client computer.
	For CIC 2015 R1 through 2018 R3 only, ensure that you have Microsoft .NET Framework 4.5.2 or later and 3.5.1 installed on the CIC Database Migration Assistant client computer.
	There are known issues with the CIC Database Migration Assistant and the Oracle 11.2.0.3.0 and 11.2.0.4.0 clients. For this reason, we recommend installing CIC Database Migration Assistant on a separate computer from the one used for the 4.0 CIC database.
	See "Fulfill Microsoft .NET Framework Requirements" in the <u>CIC Migration Guide</u> .
•	Install CIC Database Migration Assistant package on CIC Database Migration Assistant client computer
	Locate the CIC Database Migration Assistant .msi file, for example, DBMigrationAssistant_2015_R2.msi, on the Migration .iso.
	See "Install CIC Database Migration Assistant" in the CIC Migration Guide.

Checklist: Prepare for CIC Database Migration

At this point in the migration process, you should have already set up the CIC 4.0 database server, created a CIC 2015 R1 or later database as part of the CIC 4.0 server installation, created a client computer for the migration, and installed CIC Database Migration Assistant on the CIC Database Migration Assistant client computer.

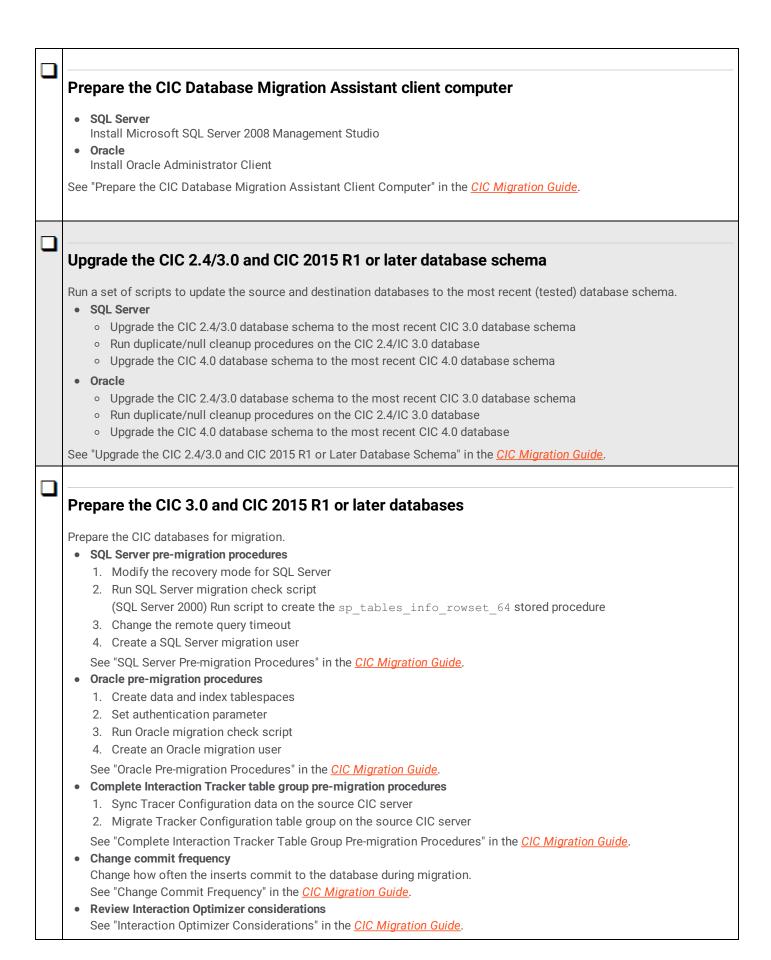

Prepare the CIC 3.0 and CIC 2015 R1 or later servers
 Prepare the CIC 3.0 and CIC 2015 R1 or later servers for migration. Apply the recommended CIC 3.0 and CIC 2015 R1 or later Interaction Recorder ESs Stop Reporting, Recorder, and Tracker purge processes on CIC 3.0 and CIC 2015 R1 or later servers (highly recommended)
See "Prepare the CIC 3.0 and CIC 4.0 Servers" in the <u>CIC Migration Guide</u> .
If applicable, rescue orphaned recordings in Interaction Recorder Orphaned recordings don't migrate with CIC Database Migration Assistant. See "Rescue Orphaned Recordings in "Interaction Recorder" in the CIC Migration Guide.

Checklist: Migrate the CIC 3.0 Database

	About CIC Database Migration Assistant
	CIC Database Migration Assistant checks database schema version, generates and runs customer script files, and tracks specified configuration data along with migrated data to assist with migrating multiple sets of data.
	See "How CIC Database Migration Assistant Migrates the Database" in the CIC Migration Guide.
_	
_	Review database migration considerations
	Review these considerations so that you can successfully tailor the CIC database migration for your implementation. • Migration scenarios • Incremental migrations • Optimizer table group considerations
	 Tracker Configuration table group considerations Customized service levels About the Migration scripts
	See "Migrate the CIC 3.0 Database" in the CIC Migration Guide.
	The initial of the one parabase in the one initial one initial one of the initial one of the one of
	Migrate the CIC 3.0 database using CIC Database Migration Assistant
	Follow the step by step instructions to run CIC Database Migration Assistant on the CIC Database Migration Assistant client computer to migrate the CIC 3.0 database.
	If you use Interaction Dialer, run the Interaction Dialer Database Migration Assistant to migrate the Dialer 3.0 database later.
	See "Migrate the CIC 3.0 Database" in the CIC Migration Guide.
П	
_	Review CIC Database Migration Assistant troubleshooting information
	 Clean up scripts CIC Database Migration Assistant runs clean up scripts to resolve errors that occur during the migration. If the cleanup scripts fail to run, contact PureConnect Customer Care. If the migration fails, see PureConnect KB article to determine source data that didn't migrate.
	See "Troubleshooting the CIC Database Migration Assistant" in the <u>CIC Migration Guide</u> .
_	Complete CIC 2015 R1 or later database post-migration procedures
	 Run post-migration check script Restart Reporting, Recorder, and Tracker data purge processes on the CIC 4.0 server Reapply Interaction Recorder Security Policies
	See "Complete CIC 2015 R1 or Later Database Post-migration Procedures" in the CIC Migration Guide.

Checklist: Prepare for Interaction Dialer Database Migration

For Interaction Dialer sites only.

It is critical that you run CIC Database Migration Assistant for Dialer:

- After running CIC Database Migration Assistant to migrate the CIC database
- Before importing CIC and Dialer configuration data using Interaction Migrator

Prepare the CIC Database Migration Assistant client computer • Copy UDL folder and Dialer configuration file to the CIC Database Migration Assistant client computer. • (Oracle only) Configure TNS names on the CIC Database Migration Assistant client computer. See "Prepare the CIC Database Migration Assistant Client Computer for the Dialer Database Migration" in the CIC Migration Guide. Upgrade the Interaction Dialer 2015 R1 or later database schema The Interaction Dialer 2015 R1 or later database schema upgraded when you upgraded the CIC 2015 R1 or later database See "Upgrade the Interaction Dialer 2015 R1 or Later Database Schema" in the CIC Migration Guide. Prepare the Interaction Dialer 3.0 and Interaction Dialer 2015 R1 or later databases Prepare the Interaction Dialer databases for migration. You completed some of these tasks when you prepared the CIC 3.0 and CIC 2015 R1 or later databases for the migration. • SQL Server pre-migration procedures Modify the recovery mode for SQL Server o Create a SQL Server user See "SQL Pre-migration Procedures" in the CIC Migration Guide. • Oracle pre-migration procedures Set the authentication parameter o Create an Oracle user Configure Oracle TNS names/Net service names on the CIC server See "Oracle pre-migration procedures" in "Prepare for Interaction Dialer Database Migration" in the CIC Migration Guide. • Cross platform migration procedures PureConnect KB article for connecting an Oracle database to a SQL server database and vice versa. See "Cross Platform Data Migration" in the CIC Migration Guide.

See "Apply Interaction Dialer ESs to CIC 2015 R1 or Later and IC/ODS 2015 R1 or Later Servers" in the CIC Migration Guide.

Apply Dialer ESs to CIC 2015 R1 or later and CIC/ODS 2015 R1 or later servers

Checklist: Migrate the Interaction Dialer 2.4/3.0 Database

For Interaction Dialer sites only.

Note: CIC Database Migration Assistant for Dialer migrates historical information only. Moving Dialer contact lists and updating Dialer campaigns is a post-migration procedure, described in this checklist.

Review Dialer database migration considerations Review these considerations so that you can successfully tailor the Dialer database migration for your implementation: · Decide how to handle deleted workflows Subdivide migration by workflow • Depending on filters selected, Dialer data may not migrate • Delete workflows that do not contain historical workflow tables See "Dialer Database Migration Considerations" in the CIC Migration Guide. Migrate the Dialer 2.4/3.0 database using CIC Database Migration Assistant for Dialer Follow the step by step instructions to run CIC Database Migration Assistant for Dialer on the CIC Database Migration Assistant client computer to migrate the CIC 3.0 database. Make sure that you are logged on as the same user that ran the CIC Database Migration Assistant to migrate the CIC database. See "Migrate the Dialer 2.4/3.0 Database" in the CIC Migration Guide. If needed, review CIC Database Migration Assistant for Dialer troubleshooting information If the migration fails, see PureConnect KB article to determine source data that didn't migrate. See "Troubleshooting the CIC Database Migration Assistant for Dialer" in the CIC Migration Guide. Complete Dialer 2015 R1 or later database post-migration procedures • Run post-migration check script (Recommended) See PureConnect KB article to move Dialer contact lists and update Dialer campaigns to point to new See "Complete Dialer Database Post-migration Procedures" in the CIC Migration Guide.

Migrate the Configuration

Checklist: Import CIC 2.4/3.0 (and Dialer 2.4/3.0) Configuration Data

	Before importing configuration data
	Review the items that must have completed successfully before running Interaction Migrator to import the CIC (and Dialer) configuration data:
	 Initial run of IC Setup Assistant completed successfully on the import CIC 2015 R1 or later server.
	CIC database migrated successfully using CIC Database Migration Assistant (Interaction Diology Diology database migrated successfully using CIC Database Migration Assistant for Diology
	 (Interaction Dialer) Dialer database migrated successfully using CIC Database Migration Assistant for Dialer. Verify that the Network Interface Card (NIC) or NIC team uses the same name on the new server as on the existing server.
	See "Before You Run Interaction Migrator to Import CIC 2.4/3.0 Configuration Data" in the CIC Migration Guide.
П	
_	Import CIC 2.4/3.0 (and Dialer 2.4/3.0) configuration data to CIC 2015 R1 or later server using Interaction Migrator
	Follow the step by step instructions to run Interaction Migrator on the CIC 2015 R1 or later server to import the CIC 2.4/3.0 configuration data.
	Interaction Migrator imports Interaction Dialer 2.4/3.0 configuration data along with the CIC 2.4/3.0 configuration data.
	See "Run Interaction Migrator to Import CIC 2.4/3.0 Configuration Data" in the CIC Migration Guide.
П	
_	Re-activate ACD email routing
	Interaction Migrator set mail providers inactive during the import. Once the CIC 2015 R1 or later server is in full production, re-activate ACD Email Routing.
	See "Re-activate ACD Email Routing" in the <u>CIC Migration Guide</u> .
П	
_	Review migrated server parameters using the Server Parameter Query
	Use the Server Parameter Query to query the migrated CIC 2.4/3.0 server parameters to determine which ones you need for CIC 2015 R1 or later and remove the ones you don't need.
	See "Review Migrated Server Parameters" in the <u>CIC Migration Guide</u> .
П	
_	Complete handler post-migration procedures
	If you use custom handlers, follow the step by step handler post-migration procedures.
	Open and publish custom-written handlers
	Modify and publish 2015 R1 or later base handlers (including customization points) Out Output Landler Duart rejection Duart deposit Duart Duart
	See "Complete Handler Post-migration Procedures" in the <u>CIC Migration Guide</u> .
	Note change in default SIP transport protocol
	Note that the default protocol is UDP.
	See "Note Change in Default SIP Transport Protocol" in the <u>CIC Migration Guide</u> .

Complete Interaction Dialer post-migration procedures

Make sure that you reviewed the new features and changes in Interaction Dialer 2015 R1 or later in "Interaction Dialer" in the CIC Migration Guide.

Complete the following Interaction Dialer post-migration procedures.

1. Review migrated Dialer settings and complete post-migration procedures in Interaction Administrator

- o Reconfigure Rules and Policy Sets
- Configure Campaigns in a multiple ODS environment
- o Configure Time Zone Maps and assign them to campaigns, where applicable
- Configure DNC sources and assign them to campaigns, where applicable
- o Configure maximum calls and call rate
- Configure maximum lines per campaign
- o Enter Default Settings for Interaction Dialer containers

See "Review Migrated Dialer Settings and Complete Post-migration Procedures" in the CIC Migration Guide.

2. Configure new Dialer 2015 R1 or later features in Interaction Dialer Manager

- o Review and modify wrap-up categories and codes
- Confirm the From email field in Policy and Rule actions
- o Assign access and security rights
- o Assign a configurable priority number to campaigns for multiple campaigns

See "Configure New Interaction Dialer 2015 R1 or Later Features in Interaction Dialer Manager" in the CIC Migration Guide.

3. Modify custom scripts for changes in Dialer 2015 R1 or later

Custom Interaction Scripter scripts don't migrate and require modification by a programmer. See "Modify Custom Scripts for Changes in Dialer 2015 R1 or Later" in the <u>CIC Migration Guide</u>.

4. Recreate Supervisor alerts for Dialer statistics in CIC Business Manager (Interaction Supervisor)

Interaction Supervisor alerts set up for Interaction Dialer statistics do not migrate; you have to recreate them. See "Recreate Supervisor Alerts for Dialer Statistics in CIC Business Manager" in the <u>CIC Migration Guide</u>.

Checklist: Migrate CIC 3.0 Managed IP Phones

Ξ	Review Polycom firmware requirements
	Verify that your Polycom phones are running the appropriate firmware version in the Managed IP Phones container in Interaction Administrator.
	Review supported Polycom phone models and firmware.
	See: • "Polycom Firmware Requirements" in the <u>CIC Migration Guide</u> . • "Additional Configuration (Polycom)" in the <u>CIC Managed Phones Administrator's Guide</u> .
_	Review the options for pointing the phones to the CIC 2015 R1 or later server
	You can use the following methods to point the managed IP phones to the CIC 2015 R1 or later server: • DHCP custom option (recommended) • DNS Host (A) record • Manual configuration
	See "Options for Pointing Phones to the CIC 4.0 Server" in the <u>CIC Migration Guide</u> .
	Point the phones to the CIC 2015 R1 or later server using DHCP custom option or other available options Follow the step by step instructions to point the CIC 3.0 managed IP phones to the CIC 2015 R1 or later server using the recommended DHCP custom option (or one of the other options). Important! Complete the procedure only for the phones that you are ready to move. See "Point the Phones to the CIC 2015 R1 or Later Server" in the CIC Migration Guide.
Che	ecklist: Migrate Interaction Media Server 3.0

_	Review Interaction Media Server 3.0 to 2015 R1 or later migration options
	Review supported scenarios for upgrading existing Interaction Media Servers to Interaction Media Server 2015 R1 or later: New Interaction Media Server 2015 R1 or later appliance Existing Interaction Media Server G6 3.0 appliance upgraded to 2015 R1 or later Existing Interaction Application Server (IAS) G7 or CIC Server G7 or 3.0 appliance used as Interaction Media Server
	See "Review Interaction Media Server 3.0 to 2015 R1 or Later Migration Options" in the CIC Migration Guide.
_	Fulfill Interaction Media Server migration requirements
	Before migrating to Interaction Media Server 2015 R1 or later, ensure that you have fulfilled the licensing and other requirements.
	See "Before You Begin the Migration in Migrate Interaction Media Server" in the <u>CIC Migration Guide</u> .

_	Install Interaction Migrator on Interaction Media Server 3.0
	Interaction Migrator exports and imports Interaction Media Server 3.0 certificate, configuration data, and resources to Interaction Media Server 2015 R1 or later.
	Follow the step by step instructions to install Interaction Migrator on the Interaction Media Server 3.0.
	See "Install Interaction Migrator 2015 R1 or Later" in the <u>CIC Migration Guide</u> .
_	
	Export Interaction Media Server 3.0 configuration data
	Follow the step by step instructions to run Interaction Migrator on the Interaction Media Server 3.0 to export Interaction Media Server configuration data.
	See "Export Interaction Media Server 3.0 Configuration Data" in the <u>CIC Migration Guide</u> .
П	
_	Complete Interaction Media Server pre-migration procedures
	Complete these tasks necessary for migrating Interaction Media Server:
	 Copy stored recordings and update recordings storage path - If you store Interaction Media Server 3.0 recordings locally Export SIP Proxy configuration and save to an external location - If you use Interaction Media Server 3.0 as a SIP Proxy
	See "Complete Interaction Media Server Pre-migration Procedures" in the CIC Migration Guide.
_	Install a new Interaction Media Server 4.0 or upgrade existing Interaction Media Server 3.0 appliance to 2015 R1 or later
	Important!
	Determine the computer name to use when the server is running Interaction Media Server 2015 R1 or later. The migration process is simpler if you use the same name that the computer had when running Interaction Media Server 3.0.
	Follow the appropriate instructions for installing or upgrading to Interaction Media Server 2015 R1 or later for your implementation.
	Install a new Interaction Media Server 2015 R1 or later
	 Upgrade existing Interaction Media Server G6 appliance to 4.0 Upgrade existing Interaction Appliance (IAS) G7 or CIC Server G7 3.0 appliance used as Interaction Media Server to 2015 R1 or later
	See "Install or Upgrade to Interaction Media Server 2015 R1 or Later" in the <u>CIC Migration Guide</u> .
_	
Ц	Install Interaction Migrator on Interaction Media Server 4.0
	Make sure that you installed the .NET Framework 3.5.1 on Interaction Media Server 2015 R1 or later.
	Follow the step by step instructions to install Interaction Migrator on the Interaction Media Server 3.0.
	See "Fulfill Requirements for Installing Interaction Migrator" and "Install Interaction Migrator" in the CIC Migration Guide.
П	
	Import Interaction Media Server 3.0 configuration data
	Follow the step by step instructions to run Interaction Migrator on the Interaction Media Server 4.0 to export Interaction Media Server 3.0 configuration data.
	See "Import Interaction Media Server 3.0 Configuration Data" in the <u>CIC Migration Guide</u> .



Complete Interaction Media Server post-migration procedures

- If applicable, generate new certificates for CIC servers
- Update recordings storage path in Interaction Recorder Policy Editor
- Restore SIP Proxy configuration file to SIP Proxy Server install directory. Set up other applications from the Interaction Media Server 3.0 migration
- Add CIC 2015 R1 or later server to Interaction Media Server

See "Complete Post-migration Procedures" in the <u>CIC Migration Guide</u>.

Migrate Client Workstations

inigrate offerit Workstations	
Checklist: Complete Workstation Migration Planning Procedures	

_	Review options for upgrading CIC 3.0 client workstation applications to CIC 2015 R1 or later
	 Interactive Update (recommended) Manual (Setup.exe) Group Policy
	See "Options for Upgrading CIC 3.0 Client Workstation Applications" in the <u>CIC Migration Guide</u> .
_	Review CIC 3.0 to CIC 2015 R1 or later client workstation upgrade installation information
	 Migration/upgrade scenario is for same OS only Previously install workstation applications are uninstalled Previously installed localized workstation applications and language-related files and registry keys
	See "Options for Upgrading CIC 3.0 Client Workstation Applications" in the <u>CIC Migration Guide</u> .
	Fulfill CIC 2015 R1 or later client workstation hardware requirements
	For running IC User Applications, CIC Business Manager Applications, and CIC Server Manager Applications.
	See "Client Workstation" in the <u>PureConnect Installation and Configuration Guide</u> .
	Fulfill CIC 4.0 client workstation software requirements
	For running IC User Applications, CIC Business Manager Applications, and CIC Server Manager Applications.
	See:
	 "CIC 2015 R1 or Later Client Workstation Software Requirements" in the <u>CIC Migration Guide</u>. See "Client Workstation" in the <u>PureConnect Installation and Configuration Guide</u>.
	Review changes to IC User Applications in CIC 2015 R1 or later
	 32-bit and 64-bit IC User Applications installs Interaction Screen Recorder Capture Client and Interaction Fax 64-bit Print Driver installs included in IC User Applications installs
	See "Changes to IC User Applications in CIC 2015 R1 or Later" in the CIC Migration Guide.
_	Review how custom client settings are handled during the migration
	Custom client settings stored on the CIC server
	Custom client settings stored on the workstation
	See "Changes to IC User Applications in CIC 2015 R1 or Later" in the <u>CIC Migration Guide</u> .
	Review how localized client workstation applications are handled during the migration
	See "Localized Client Workstation Application Upgrades" in the <u>CIC Migration Guide</u> .
,	Review how Interaction Dialer client workstation application upgrades are handled during the migration

Checklist: Migrate CIC 3.0 Workstations Using Interactive Update

Interactive Update is the recommended method for migrating CIC 3.0 workstations.

J	Fulfill required CIC and Interactive Update versions
	It is crucial that you install the required CIC and Interactive Update Service Updates for these computers before the upgrade: CIC 3.0 server CIC 3.0 client workstation CIC 2015 R1 or later server
	See "Required CIC and Interactive Update Versions" in the CIC Migration Guide.
	Review Interactive Update Provider 1.0 and 2015 R1 or later settings
	See "Interactive Update Provider Settings" in the <u>CIC Migration Guide</u> .
]	Review CIC 3.0 to CIC 2015 R1 or later migration client workstation migration summary
	Summary of tasks performed on Interactive Update Provider 1.0 and Interactive Update Provider 2.0.
	See "CIC 3.0 to CIC 4.0 Client Workstation Migration Overview" in the CIC Migration Guide.
7	Complete Part 1: Client workstation upgrade tasks on Interactive Update Provider 1.0
	Follow the step by step instructions to:
	 Add the Interactive Update Client 2.0 as a new update, allow workstations to receive updates from Provider 2.0. Create a migration computer group
	Mark Interactive Update Client 2.0 install as GA and push out the migration computer group
	See "Part 1: Client Workstation Upgrade Tasks on Interactive Update Provider 1.0" in the <u>CIC Migration Guide</u> .
П	
	Complete Part 2: Client workstation upgrade tasks on Interactive Update Provider 2015 R1 or later
	Follow the step by step instructions to:
	Add the latest Interactive Update Client 3.0 SU on the CIC 2015 R1 or later server Add the CIC 2015 R1 or later alignment of the company of the compan
	 Add the CIC 2015 R1 or later client workstation application installs as new updates Add the Client Language Plugins as new updates
	Mark the installs and SUs as GA and push out to client workstations
	See "Part 2: Client Workstation Upgrade Tasks on Interactive Update Provider 2015 R1 or Later" in the CIC Migration Guide.

Checklist: Migrate CIC 3.0 Workstations Using Setup.exe

7	Review Setup.exe functionality
	Setup.exe is available in each of the CIC client workstation application shares on the CIC 2015 R1 or later server. Setup.exe manually installs CIC client workstation applications on individual workstations.
	See "About Setup.exe" in the <u>CIC Migration Guide</u> .
П	
7	Upgrade IC User Applications using Setup.exe
	 Fulfill IC User Applications (32-bit and 64-bit) requirements Upgrade Interactive Update Client Follow the step by step instructions
	Upgrade IC User Applications Follow the step by step instructions
	Verify FQDN resolution to ensure client connectivity with host server
	See "IC User Applications (32-bit and 64-bit)" in the <u>CIC Migration Guide</u> .
	Upgrade CIC Business Manager Applications using Setup.exe
	Fulfill CIC Business Manager Applications requirements
	Upgrade CIC Business Manager Applications Verify FORM and letter to a second distribution with boot a second distribution.
	Verify FQDN resolution to ensure client connectivity with host server
	See "CIC Business Manager Applications" in the <u>CIC Migration Guide</u> .
	Upgrade CIC Server Manager Applications using Setup.exe
	 Fulfill CIC Server Manager Applications (32-bit and 64-bit) requirements Upgrade CIC Server Manager Applications
	Verify FQDN resolution to ensure client connectivity with host server
	See "CIC Server Manager Applications" in the <u>CIC Migration Guide</u> .

Migrate Other Products

Checklist: Migrate Interaction Conference

Existing Interaction Conference 3.0 systems must migrate to Interaction Conference 2015 R1 or later as part of the CIC 3.0 to 2015 R1 or later migration process.

_	Review Interaction Conference components to migrate
	See:
	 "Interaction Conference Architecture" in the <u>CIC Migration Guide</u>. <u>Interaction Conference Administrator's Guide</u>.
_	Fulfill Interaction Conference migration requirements
	Review Interaction Conference 3.0 and 4.0 server requirements
	See "Interaction Conference Migration Requirements" in the <u>CIC Migration Guide</u> .
_	Migrate Interaction Conference
	Run Interaction Migrator to export Interaction Conference 3.0 configuration data Install Interaction Conference 2015 R1 or later
	 Run CIC Database Migration Assistant to migrate the Interaction Conference database Change the Interaction Conference site ID
	Run Interaction Migrator to import the Interaction Conference configuration data
	See:
	"Migrate Interaction Conference" in the <u>CIC Migration Guide</u> .
	Interaction Conference Administrator's Guide.

Checklist: Migrate Interaction Director

Note: Support for Interaction Director 2015 R1 or later is not currently available. Genesys has not updated this checklist.

Existing Interaction Director 2.4 systems must migrate to Interaction Director 4.0 as part of the CIC 3.0 to 4.0 migration process

7	Review Interaction Director components to migrate
	See:
	• "Interaction Director Client/Server Architecture" in the <u>CIC Migration Guide</u> .
	<u>Director Monitored Server Installation and Configuration Guide.</u>
	Interaction Dialer Installation and Configuration Guide.
_	Fulfill Interaction Director migration requirements
	Review Interaction Director 2.4 and 4.0 server requirements
	See "Interaction Director Migration Requirements" in the <u>CIC Migration Guide</u> .
]	
J	Migrate Interaction Director monitored servers
	Run Interaction Migrator to migrate the Interaction Director configuration on each Interaction Director-monitored server in your implementation as part of the CIC 2.4/3.0 to CIC 4.0 migration process.
	See "Migrate Interaction Director Monitored Servers" in the <u>CIC Migration Guide</u> .
]	
_	Migrate the Director server
	Run Interaction Migrator on the Interaction Director 2.4 server
	Install Interaction Director 4.0 server
	Run Interaction Migrator to export Interaction Director 2.4 configuration data
	Run CIC Database Migration Assistant to migrate the Interaction Director database Pure letters this a Migration Assistant to migrate the Interaction Director database On the Company of the Compa
	Run Interaction Migrator to import the Interaction Director configuration data
	See:
	• "Migrate the Director Server" in the <u>CIC Migration Guide</u> .
	Interaction Dialer Installation and Configuration Guide.

Change Log

The following table lists the changes to the Migration Checklists since it's initial release.

Date	Change
27-March- 2018	Added link to "CIC 4.0 License Upgrade Guide" in the Checklist: Complete migration planning procedures section.
14-June- 2018	Added Microsoft .NET Framework 4.7 or later software requirement for PureConnect 2018 R4 or later.
26-March- 2019	Moved "Migration Checklists" content to "Abstract" and deleted "Migration Checklists."
12-April- 2019	Reorganized the content only, which included combining some topics and deleting others that just had an introductory sentence such as, "In this section".